

Product datasheet

Specifications



APC NetShelter Rack PDU Advanced, Metered, 3Phase, 22.1kW 400V 32A or 17.3kW 415V 30A, 48 Outlets, IEC309

APDU10350ME

EAN Code: 0731304439714

Overview

Lead time Usually in Stock

Main

Colour Black

Product or component type PDU

PDU type Metered

Cord length 1.8 m

Complementary

Input Voltage 415 V 3 phases
400 V 3 phases

Height 1780 mm

Width 56 mm

Output Voltage 240 V

Depth 75 mm

Net weight 8.4 kg

Mounting location Side

Mounting preference No preference

Input Plug Type IEC 60309 30 A 3P + N + PE

Mounting mode Rack-mounted

Rack units 0U

Mounting position Vertical

Communication port protocol 1000BASE-T
10/100BASE-T

[In] rated current 24 A

permissible voltage 200...240 V
346...415 V

Input current limits 30 A

Load capacity 17300 VA

Network frequency 50/60 Hz

Outlet type and quantity 24 C13/C15/C19/C21
24C13/C15

Rates duty January 2016

Environment

| | |
|----------------------------------------------|---------------------------------------------------------------------------------|
| Product certifications | TAA compliance BAA compliance |
| Standards | UL 62368-1 CSA C22.2 No 62368-1 FCC part 15 Subpart B CE EN 62368-1 |
| IP degree of protection | IP44 |
| Ambient air temperature for operation | -5...60 °C |
| Relative humidity | 5...95 % |
| Operating altitude | 0...10000 ft |
| Ambient air temperature for storage | -25...65 °C |
| Storage Relative Humidity | 5...95 % |
| Storage altitude | 0...15240 m |

Packing Units

| | |
|-------------------------------------|---------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 198 cm |
| Package 1 Width | 13.2 cm |
| Package 1 Length | 26.2 cm |
| Package 1 Weight | 11.4 kg |

Contractual warranty

| | |
|-----------------------------|----|
| Warranty (in months) | 36 |
|-----------------------------|----|



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Total lifecycle Carbon footprint **2867**

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard **No**

Packaging without single use plastic **No**

[EU RoHS Directive](#) **Compliant**

REACH Regulation [REACH Declaration](#)

Energy efficiency

Energy Efficiency Optimized **Energy efficient product**

Use Again

Repack and remanufacture

End of life manual availability [End of Life Information](#)


Take-back **Yes**

WEEE Label  **The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins**

Image of product / Alternate images

Alternative

Multiple color options available

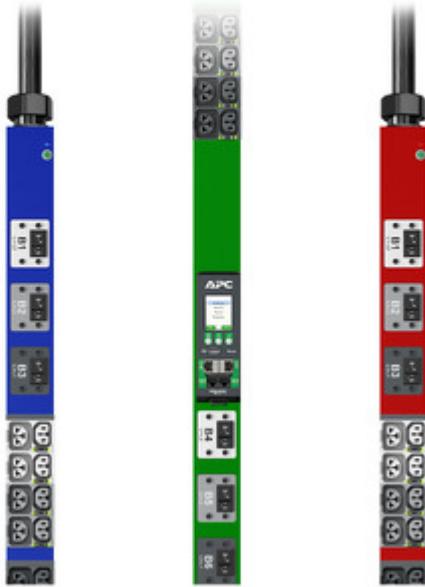

4-in-1 outlet for increased flexibility



Acts as any of these outlet types:



C13



C15



C19



C21













